

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 September 2004 (30.09.2004)

PCT

(10) International Publication Number
WO 2004/083063 A1

(51) International Patent Classification⁷: **B65D 33/24**

(21) International Application Number:
PCT/KR2003/001699

(22) International Filing Date: 22 August 2003 (22.08.2003)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
20-2003-0008615 22 March 2003 (22.03.2003) KR

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: AHN, Joon-Yeong [KR/KR]; 401, Joon-gang-Yeonrip, 709-1 Wa-dong, Danwon-ku, Ansan-city, Kyunggi-do 425-841 (KR).


Published:

— with international search report

(74) Agent: DARAE PATENT FIRM; 10th Floor, KIPS, 647-9 Yeoksam-dong, Kangnam-ku, Seoul 135-980 (KR).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: NOZZLE FOR VACUUM PACKAGING

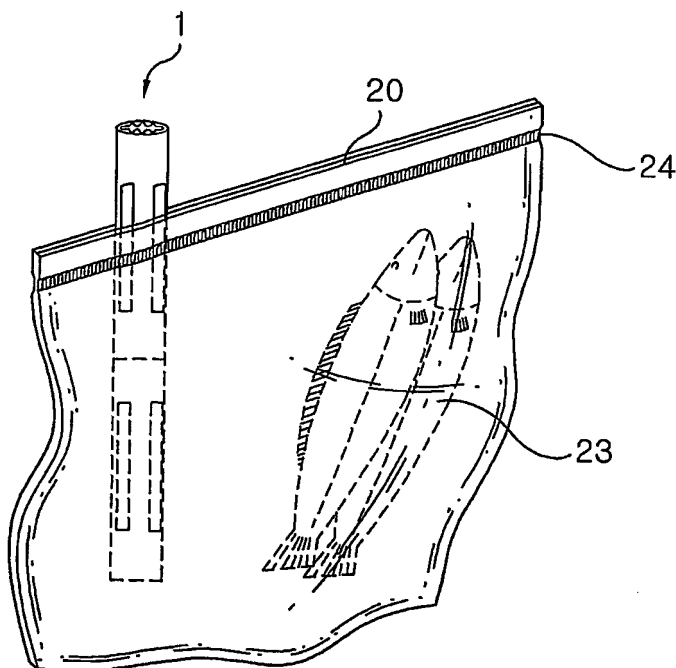

(57) Abstract: Disclosed is a nozzle for vacuum sealing a plastic bag, the nozzle including: an embossing part formed on the peripheral surface of the nozzle, so that air discharging passages are formed on the peripheral surface of the nozzle; and a plurality of break lines formed at predetermined regular intervals on the outer peripheral surface of the nozzle, for cutting the nozzle to a predetermined length, wherein the nozzle is made of a heat sealable material, so that the nozzle cut by the break line is inserted into the plastic bag and heat sealed together with the plastic bag.